

Specification Approval Sheet

Customer Name: _____

Customer Model: _____

Product Model: NUE11SJJ253947X520A

Prepared by	Checked by	Approved by
Zhou Xinping	Ou Yiping	Wu Fuquan

Customer Approved	Test by	Checked by	Approved by
(Stamp)			



PRODUCT SPECIFICATION

DOC NO.: NUE0155-LPPS-010
REV. : A0
SHEET : 2 OF 17

Revision History

Revision	Description	Date	Approval
A0	Release	2016-08-19	WF

Contents

1. Scope
 2. Product basic information
 3. Battery Outline Drawing
 4. Electrical characteristics
 5. Condition adapting characteristics
 6. Cell safety performance
 7. Battery safety performance
 8. Others
 9. Testing requirements
 10. Electrical Characteristics
 11. Cell
 12. Electric Protect Features
 13. Schematic circuit diagram
 14. PCB Parts List BOM
 15. PCB Layout PCB
 16. Package
 17. Warranty, Battery Precautions and Safety Instructions
- Customer Inquiry

1. Scope

The specification shall be applied to Lithium-ion Polymer (LIP) rechargeable battery pack which is provided by NuEnergy Storage Technologies.


Reference standard

GB/T 18287-2013IEC/EN61960UL1642

2. Product basic information

Items	Parameter	
Battery model	253947	
Design scheme	S-8261ABJMD-G3JT2x +8205	
Nominal voltage	3.7V	
Minimum capacity	520mAh (0.2C discharge)	
Typical capacity	550mAh (0.2C discharge)	
Charging voltage	4.2V	
Discharging cut-off voltage	3.0V	
Standard charging	0.2C /4.2V	
Max charging	1.0C /4.2V	
Standard discharging	0.2C/3.0V	
Max discharging	1.0C/3.0V	
Weight	Appr. 9.5g	
Shipment voltage	≥3.90V	
Battery pack impedance	≤370mΩ	
Operating temperature	Charging: 0°C ~ 45°C	
	Discharging: -20°C ~60°C	
Storage (At 50% SOC and specified temp, recoverable capacity in % vs time)	-10°C~25°C	(12 months, ≥85%)
	-10°C~45°C	(6 months, ≥85%)
	-10°C~55°C	(1 month, ≥90%)
	20±5°C is the recommended storage temperature	
Visual Inspection	There should not be any remarkable scratches, cracks, bolts, cauterization, deformations, swelling, leakage and so on, on the surface of the cell.	

3. Battery Outline Drawing

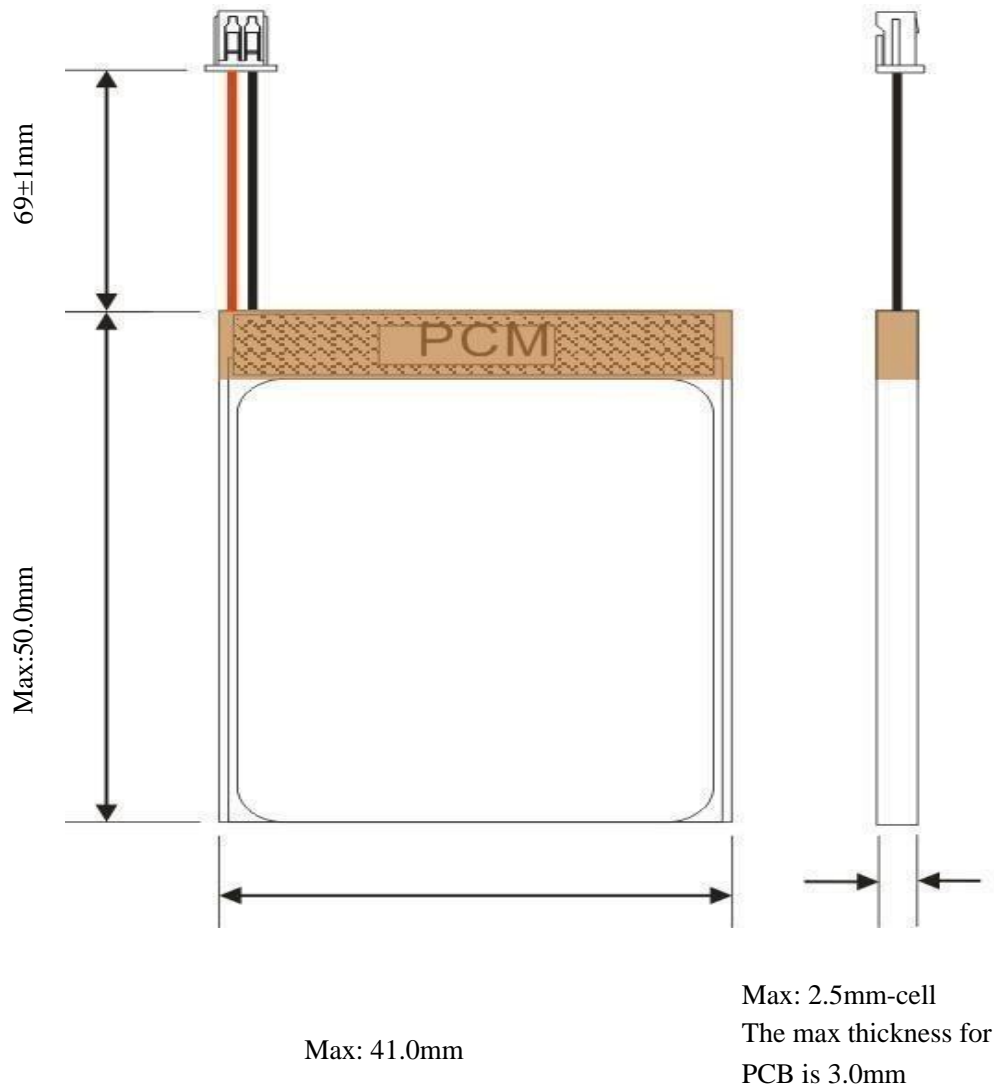

BOM (Bill of Materials)				
NO.	Material Name	Specification	Qty	Remark
1	Cell	253947/520mAh/3.7V	1	RoHS
2	Protection board	PCB9437	1	RoHS
3	Wire	Red Wire UL3302#28(P+)	1	RoHS
		Black Wire UL3302#28(P-)	1	RoHS
		Connector JST-SHR-02V-S-B	1	RoHS

4. Electrical characteristics

No.	Items	Test Method	Criteria
1	Standard Charge	Charging the cell initially with constant current at 0.2C and then with constant voltage at 4.2V till charge current declines to 0.02C.	N/A
2	Minimal Capacity	The capacity means the discharge capacity of the cell, which is measured with discharge current of 0.2C with 3.0V cut-off voltage after the standard charge.	≥520mAh
3	Charge/Discharge Cycle	The capacity on 0.2C discharge shall be measured after 300 cycles of 0.2C charge and discharge at 23±2°C.	Capacity≥80%
4	Retention Capability	After full charging, storing the battery 28 days with 20 ± 5°C condition, and then staying 1 hours with discharge current of 0.2C till 3.0V cut-off voltage.	Capacity≥85%

※ **Typical capacity**

The capacity means the average discharge capacity of the cell, which is measured with discharge current of 0.2C with 3.0V cut-off voltage after the standard charge at 23±2°C environment temperature, unit: mAh

5. Condition adapting characteristics

No.	Items	Test Method	Criteria
1	Constant temperature and Humidity	After standard charging, put cell into the box that the temperature is $40\pm 2^{\circ}\text{C}$ and the humidity ranges between 90-95% for 48 hours, then put it at $23\pm 2^{\circ}\text{C}$ for 2 hours, then discharge with current of 0.2C to the cut-off voltage.	No distortion, no rust, no leakage, no venting, no rupture, no fire, no explosion, the discharge time is not less than 3hrs.
2	High Temperature Performance Test	After full charging, put the cell into box with high temperature of $55^{\circ}\text{C}\pm 2^{\circ}\text{C}$ for 2h, then discharge with current of 1.0C to the cut-off voltage.	No distortion, no rupture, no fire, no smoke or leakage Discharge time ≥ 51 min
3	Low Temperature Performance Test	After full charging, put the cell into box with low temperature of $-10\pm 2^{\circ}\text{C}$ for 16~24h, then discharge with current of 0.2C to the cut-off voltage.	No distortion, no rupture, no fire, smoke or leakage Discharge time ≥ 3 h

6. Cell safety performance

No.	Items	Test Method	Criteria
1	Cell Overcharge	After discharge to limit voltage, charged at constant current of 3C and constant voltage of 4.6V, while voltage reaches to the max, if charging continued over 7 hours or temperature is 20% less than the top, close the test.	No explosion and no fire.
2	External Short-circuit Test	Cell terminals are short-circuited to discharged state less than 0.1V or longer time with a resistance of 50mΩ or less. Tests are to be conducted at room temperature.	No explosion and no fire.
3	Over-Discharge Test	Cell is discharged at a current of 1C rate for 2.5 hours. (If current stops by safety or passive circuit on the battery, test is finished)	No explosion and no fire.
4	Crush Test	Crush between two flat plates. Applied force is about 13kN.	No explosion and no fire.
5	Impact Test	Impact between bar (15.8mm diameter) and 9.1Kg falling material (at a height of 6.1cm). Bar is laid across the center of the test sample.	No explosion and no fire.

PRODUCT SPECIFICATION

6	Drop	After standard charging, the cell is to be dropped from a height of 1.2meter onto a thickness of 20mm board, dropped once in the positive and negative directions of three mutually perpendicular X, Y, Z axes.	No leakage, no smoke, no fire, no explosion.
7	Vibration Test	Fixed the fully charged cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz and 55Hz, the excursion of the vibration is 0.8mm. The cell shall be vibrated for 90 ~100 minutes per axis of XYZ axes.	No explosion, no fire, no leakage.
8	Heating	After standard charging, put cell in the baking oven and start , the temperature of the oven is to be raised at a rate of $5\pm 2^{\circ}\text{C}$ per minute to a temperature of $130\pm 2^{\circ}\text{C}$, remain for 30minutes at that temperature.	No explosion and no fire.

7. Battery safety performance

1	Overcharge protection	After battery charge finished, then charge the battery for 8 hours with a power which can provide 2 times more than nominal voltage and $2C_5A$ current.	No fire, no explosion. The electrical properties of normal.
2	Over discharge protection	After the battery is fully charged, discharge at $20\pm 5^\circ C$ conditions with $0.2C_5A$ until the battery voltage drops to the over discharge voltage, then discharge with a 30Ω resistor for 24 hours.	No fire, no explosion. The electrical properties of normal.
3	Short protection	After standard charging, connect the positive and negative terminals of the cell with copper wire having a maximum resistance load of 0.1Ω at room temperature, the test is discontinued when the surface temperature lower than $10^\circ C$.	The battery shall no rupture, smoke, catch fire, or leakage. Battery Voltage $\geq 3.6V$

8. Others

Any matters that this specification doesn't cover should be conferred between the customer and NuE.

9. Testing requirements

1. Battery test environment

Temperature: $23 \pm 2^{\circ}\text{C}$

Relative humidity: $60 \pm 20\%$ RH

Atmospheric pressure: 86106 KPa

2. Measuring instrumentation requirements

Voltage instrumentation requirements: Measuring the voltage meter accuracy no less than 0.5 magnitude

Current instrumentation requirements: Measuring the current meter accuracy no less than 0.5 magnitude

Time instrumentation requirements: Measuring the time meter accuracy no less than 0.1%

Temperature instrumentation requirements: Measuring the temperature meter accuracy no less than 0.5°C

Impedance instrumentation requirements: Measuring impedance should be by sinusoidal alternating (1 KHZ) test

10. Electrical Characteristics

10.1 Battery charge/discharge

1. Full charged definition

With charging voltage 4.2V, current 0.2C continued to charge the battery pack, when charging current drops to 0.02C charging is terminated, shall be full charged.

2. Full discharged definition


Standard discharge current 0.2 C for continuous discharge, when the voltage drops to discharge cut-off voltage 3.0V discharge is terminated, shall be full discharged.

11. Cell

1. Performance parameters

No	Project	Specification	Remarks	
1	Cell minimum capacity	520mAh	0.2C discharge	
2	Initial impedance	≤270mΩ	1kHz AC Impedance	
3	Nominal voltage	3.7V	/	
4	Dimensions	T	2.5mm Max	Thickness
		W	39.5mm Max	Width
		L	47.5mm Max	Cell length not including Tab sealant
		A	5.3±1.3m	Distance of tab center
		B	2.0±0.2mm	Tab width


2. Cell outline drawing

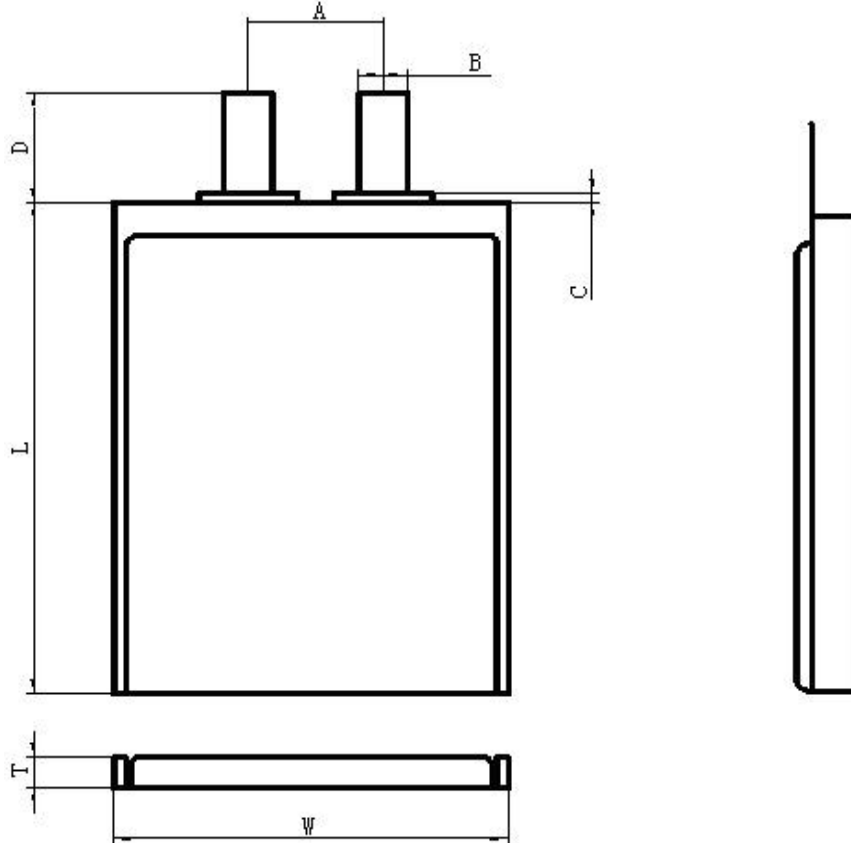

12. Electric Protect Features

Item	Symbol	Content	Criterion
Over charge Protection	V_{DET1}	Over charge detection voltage	4.28±0.05V
	tV_{DET1}	Over charge detection delay time	0.961.4s
	V_{REL1}	Over charge release voltage	4.08±0.05V
Over discharge protection	V_{DET2}	Over discharge detection voltage	3.0±0.10V
	tV_{DET2}	Over discharge detection delay time	115173ms
	V_{REL2}	Over discharge release voltage	3.0±0.10V
Over current protection	V_{DET3}	Over current detection voltage	80±30mv
	I_{DP}	Over current detection current	1.03.0A
	tV_{DET3}	Detection delay time	7.211.0ms
		Release condition	Cut load
Short protection		Detection condition	Exterior short circuit
	T_{SHORT}	Detection delay time	220380µs
		Release condition	Cut short circuit
Interior resistance	R_{DS}	Main loop electrify resistance	$V_C=4.2V R_{DS} \leq 70m\Omega$
Current consumption	I_{DD}	Current consumes in normal operation	3.0µA Type 7.0µA Max
0V Prohibition /allowance		allowance	

13. Schematic circuit diagram

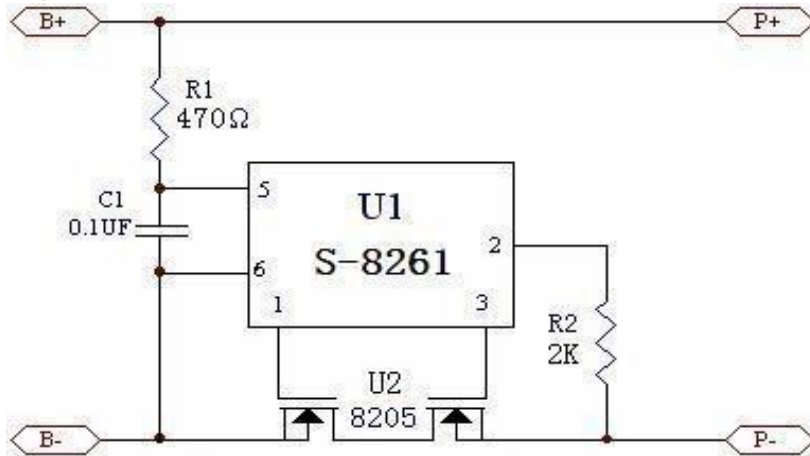


14. PCB Parts List BOM


Item	Part Name	Description	QTY	Footprint	Supplier	Remark
1	U1	S-8261ABJMD-G3JT2x	1pcs	SOT-23-6	SEIKO	
2	U2	8205	1pcs	SOT-23-6		
6	PCB	PCB9437	1pcs			

15. PCB Layout PCB


Top Layer

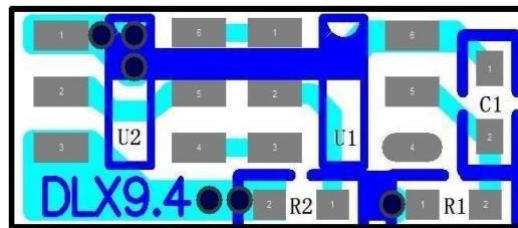

Bottom Layer

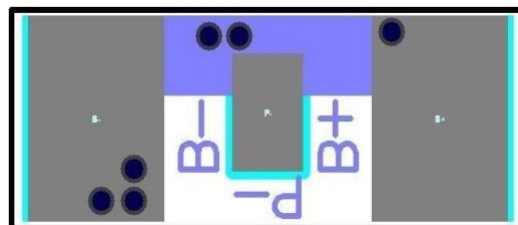

16. Package

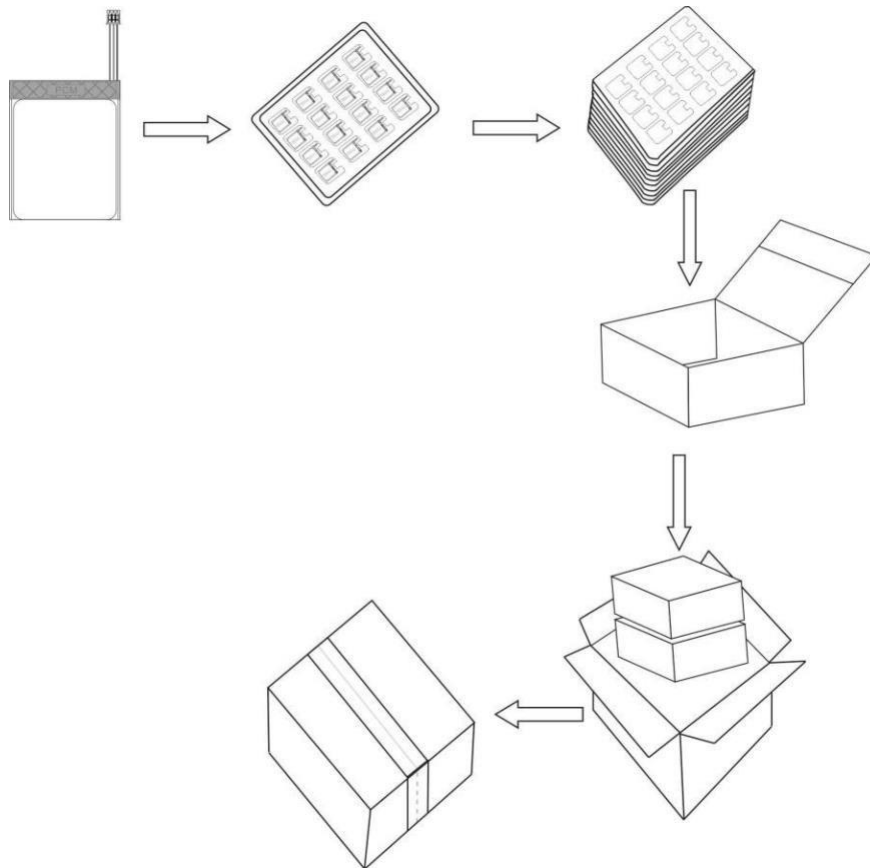

17. Warranty, Battery Precautions and Safety Instructions

Please be sure to take to comply with the specifications and the following precautions to use with batteries, if any incidents occur due to not following the specification parameters, and maintenance conditions, NuEnergy Storage Technologies will not accept any responsibility. Limited Warranty Period is 1 year from date of manufacture.

- Maintenance: Please use 0.5C charge current to charge up battery to 60% SOC every 3-6 months to prevent over discharge and degradation while in storage. Every 12 months a full cycle shall be performed to prevent degradation.
- Before Use the battery, carefully read the instruction manual and battery labels.
- Need to use the original battery charger and should be placed in a dry ventilated place.
- Such as long-term when not in use, the battery charger to charge state half full, remove the battery from the device and separated, to avoid metal contact with the battery, causing short-circuit or damage to the phenomenon.
- In use or during storage, battery found there has been high fever, leakage, odor, distortion and other anomalies, please stop using it immediately and stay away from the battery.
- Do not short-circuit the battery positive and negative, and careful not to allow the battery to moisture, to avoid danger.
- When using keep away from heat, High pressure environments, and do not beat, hit the battery.

Battery end of life should be immediately removed from the equipment, please properly handle security of spent batteries, do not put into fire or water.

Customer Inquiry

1. If clientele wishes to ratify specification and showpiece, please sign and return specification to NuE in 1 week.
2. The customer is requested to write down your information and contact NuE in advance, if and when the customer needs applications or operating conditions other than those described in this document. NuE could design and build such products according to your special request.

	Special Request	Criteria
1		
2		
3		
4		
5		
6		

Company Name:

Signature:

Date: