

## Specification Approval Sheet

**Customer Name:** \_\_\_\_\_

**Customer Model:** \_\_\_\_\_

**Product Model:** NUE11SJJ453737X630A

Prepared by	Checked by	Approved by
Zhou Xinping	Ou Yiping	Wu Fuquan

Customer Approved	Test by	Checked by	Approved by
(Stamp)			



# PRODUCT SPECIFICATION

DOC NO.: NUE0155-LPPS-013  
REV. : A0  
SHEET : 2 OF 17

## Revision History

Revision	Description	Date	Approval
A0	Release	2017-03-18	WF

## Contents

1. Scope
  2. Product basic information
  3. Battery Outline Drawing
  4. Electrical characteristics
  5. Condition adapting characteristics
  6. Cell safety performance
  7. Battery safety performance
  8. Others
  9. Testing requirements
  10. Electrical Characteristics
  11. Cell
  12. Electric Protect Features
  13. Schematic circuit diagram
  14. PCB Parts List BOM
  15. PCB Layout PCB
  16. Package
  17. Warranty, Battery Precautions and Safety Instructions
- Customer Inquiry

## 1. Scope

The specification shall be applied to Lithium-ion Polymer (LIP) rechargeable battery pack which is provided by NuEnergy Storage Technologies, LLC.


### Reference standard

GB/T 18287-2013, IEC/EN61960, UL1642

## 2. Product basic information

Items	Parameter	
Battery model	453737	
Design scheme	S-8261ABMMD-G3MT2x +8205A	
Nominal voltage	3.7V	
Minimum capacity	630mAh (0.2C discharge)	
Typical capacity	650mAh (0.2C discharge)	
Charging voltage	4.2V	
Discharging cut-off voltage	3.0V	
Standard charging	0.2C /4.2V	
Max charging	1.0C /4.2V	
Standard discharging	0.2C/3.0V	
Max discharging	1.0C/3.0V	
Weight	Appr. 11.7g	
Shipment voltage	≥3.85V	
Battery pack impedance	≤150mΩ	
Operating temperature	Charging: 0°C ~ 45°C	
	Discharging: -20°C ~60°C	
Storage (At 50% SOC and specified temp, recoverable capacity in % vs time)	-10°C~25°C	(12 months, ≥85%)
	-10°C ~45°C	(6 months, ≥85%)
	-10°C~55°C	(1 month, ≥90%)
	20±5°C is the recommended storage temperature	
Visual Inspection	There should not be any remarkable scratches, cracks, bolts, cauterization, deformations, swelling, leakage and so on, on the surface of the cell.	

### 3. Battery Outline Drawing

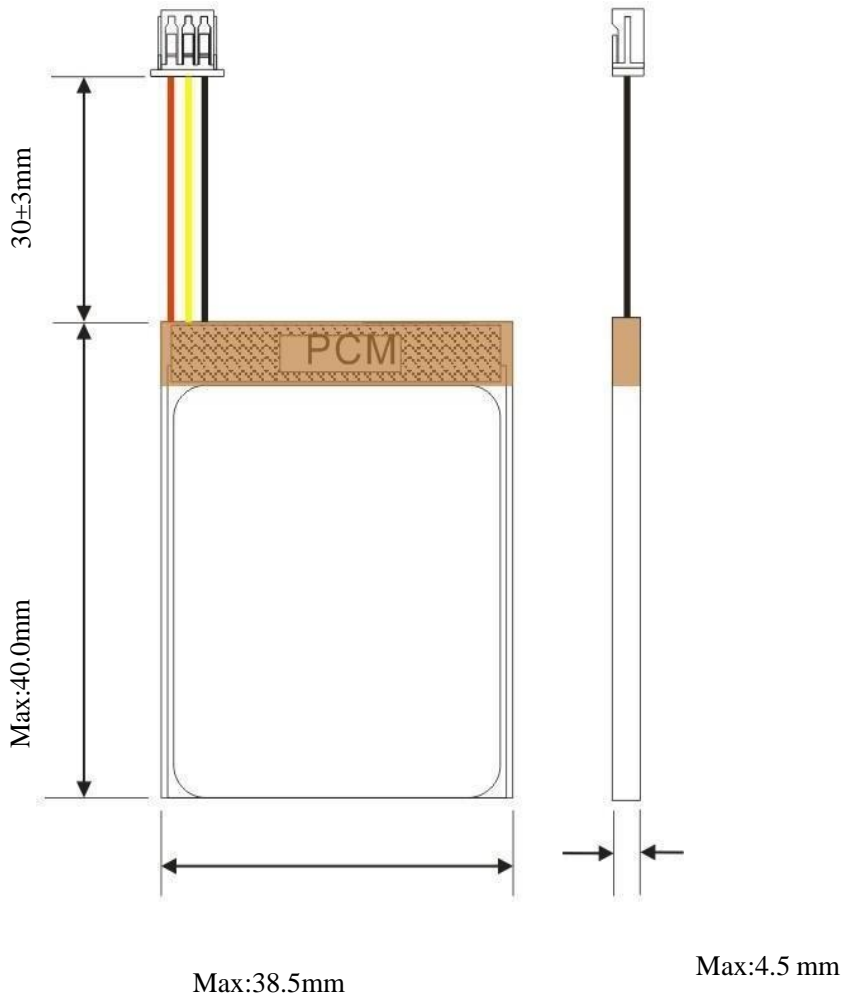

BOM (Bill of materials)				
NO.	Material Name	Specification	Qty	Remark
1	Cell	453737/630mAh/3.7V	1	RoHS
2	Protection board	PCB1640-15	1	RoHS
3	Wire	Red Wire UL3302#26	1	RoHS
		Black Wire UL3302#26	1	RoHS

#### 4. Electrical characteristics

No.	Items	Test Method	Criteria
1	Standard Charge	Charging the cell initially with constant current at 0.2C and then with constant voltage at 4.2V till charge current declines to 0.02C.	N/A
2	Minimal Capacity	The capacity means the discharge capacity of the cell, which is measured with discharge current of 0.2C with 3.0V cut-off voltage after the standard charge.	≥630mAh
3	Charge/Discharge Cycle	The capacity on 0.2C discharge shall be measured after 500 cycles of 0.2C charge and discharge at 23±2°C.	Capacity≥80%
4	Retention Capability	After full charging, storing the battery 28 days with 20 ± 5°C condition, and then staying 1 hours with discharge current of 0.2C till 3.0V cut-off voltage.	Capacity≥85%

※ **Typical capacity**

The capacity means the average discharge capacity of the cell, which is measured with discharge current of 0.2C with 3.0V cut-off voltage after the standard charge at 23±2°C environment temperature, unit: mAh

**5Condition adapting characteristics**

No.	Items	Test Method	Criteria
1	Constant temperature and Humidity	After standard charging, put cell into the box that the temperature is $40\pm 2^{\circ}\text{C}$ and the humidity ranges between 90-95% for 48 hours, then put it at $23\pm 2^{\circ}\text{C}$ for 2 hours, then discharge with current of 0.2C to the cut-off voltage.	No distortion, no rust, no leakage, no venting, no rupture, no fire, no explosion, the discharge time is not less than 3hrs.
2	High Temperature Performance Test	After full charging, put the cell into box with high temperature of $55^{\circ}\text{C}\pm 2^{\circ}\text{C}$ for 2h, then discharge with current of 1.0C to the cut-off voltage.	No distortion, no rupture, no fire, no smoke or leakage Discharge time $\geq 51$ min
3	Low Temperature Performance Test	After full charging, put the cell into box with low temperature of $-10\pm 2^{\circ}\text{C}$ for 16~24h, then discharge with current of 0.2C to the cut-off voltage.	No distortion, no rupture, no fire, smoke or leakage Discharge time $\geq 3$ h

## 6. Cell safety performance

No.	Items	Test Method	Criteria
1	Cell Overcharge	After discharge to limit voltage, charged at constant current of 3C and constant voltage of 4.6V, while voltage reaches to the max, if charging continued over 7 hours or temperature is 20% less than the top, close the test.	No explosion and no fire.
2	External Short-circuit Test	Cell terminals are short-circuited to discharged state less than 0.1V or longer time with a resistance of 50mΩ or less. Tests are to be conducted at room temperature.	No explosion and no fire.
3	Over-Discharge Test	Cell is discharged at a current of 1C rate for 2.5 hours. (If current stops by safety or passive circuit on the battery, test is finished).	No explosion and no fire.
4	Crush Test	Crush between two flat plates. Applied force is about 13kN.	No explosion and no fire.
5	Impact Test	Impact between bar (15.8mm diameter) and 9.1Kg falling material (at a height of 6.1cm). Bar is laid across the center of the test sample.	No explosion and no fire.



# PRODUCT SPECIFICATION

<b>6</b>	Drop	<p>After standard charging, the cell is to be dropped from a height of 1.2meter onto a thickness of 20mm board, dropped once in the positive and negative directions of three mutually perpendicular X, Y, Z axes.</p>	<p>No leakage, no smoke, no fire, no explosion.</p>
<b>7</b>	Vibration Test	<p>Fixed the fully charged cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz and 55Hz, the excursion of the vibration is 0.8mm. The cell shall be vibrated for 90 ~100 minutes per axis of XYZ axes.</p>	<p>No explosion, no fire. no leakage.</p>
<b>8</b>	Heating	<p>After standard charging, put cell in the baking oven and start, the temperature of the oven is to be raised at a rate of <math>5\pm 2^{\circ}\text{C}</math> per minute to a temperature of <math>130\pm 2^{\circ}\text{C}</math>, remain for 30minutes at that temperature.</p>	<p>No explosion and no fire.</p>

## 7. Battery safety performance

1	Overcharge protection	After battery charge finished, then charge the battery for 8 hours with a power which can provide 2 times more than nominal voltage and $2C_5A$ current.	No fire, no explosion. The electrical properties of normal.
2	Over discharge protection	After the battery is fully charged, discharge at $20\pm 5^\circ C$ conditions with $0.2C_5A$ until the battery voltage drops to the over discharge voltage, then discharge with a $30\Omega$ resistor for 24 hours.	No fire, no explosion. The electrical properties of normal.
3	Short protection	After standard charging, connect the positive and negative terminals of the cell with copper wire having a maximum resistance load of $0.1\ \Omega$ at room temperature, the test is discontinued when the surface temperature lower than $10^\circ C$ .	The battery shall no rupture, smoke, catch fire, or leakage. Battery Voltage $\geq 3.6V$

## 8. Others

Any matters that this specification doesn't cover should be conferred between the customer and NuE.

## 9. Testing requirements

### 1. Battery test environment

Temperature:  $23 \pm 2^{\circ}\text{C}$

Relative humidity:  $60 \pm 20\%$  RH

Atmospheric pressure: 86106 KPa

### 2. Measuring instrumentation requirements

Voltage instrumentation requirements: Measuring the voltage meter accuracy no less than 0.5 magnitude

Current instrumentation requirements: Measuring the current meter accuracy no less than 0.5 magnitude

Time instrumentation requirements: Measuring the time meter accuracy no less than 0.1%

Temperature instrumentation requirements: Measuring the temperature meter accuracy no less than  $0.5^{\circ}\text{C}$

Impedance instrumentation requirements: Measuring impedance should be sinusoidal alternating (1 KHZ) test

## 10. Electrical Characteristics

### 10.1 Battery charge/discharge

#### 1. Full charged definition

With charging voltage 4.2V, current 0.2C continued to charge the battery pack, when charging current drops to 0.02C charging is terminated, shall be full charged.

#### 2. Full discharged definition


Standard discharge current 0.2 C for continuous discharge, when the voltage drops to discharge cut-off voltage 3.0V discharge is terminated, shall be full discharged.

**11. Cell**

1. Performance parameters

No	Project	Specification	Remarks	
1	Cell minimum capacity	630mAh	0.2C discharge	
2	Initial impedance	≤50mΩ	1kHz AC Impedance	
3	Nominal voltage	3.7V	/	
4	Dimensions	T	4.5mmMax	Thickness
		W	39.0mmMax	Width
		L	38.5mmMax	Cell length not including Tab sealant
		A	15±2.0mm	Distance of tab center
		B	4.0±0.2mm	Tab width


2. Cell outline drawing

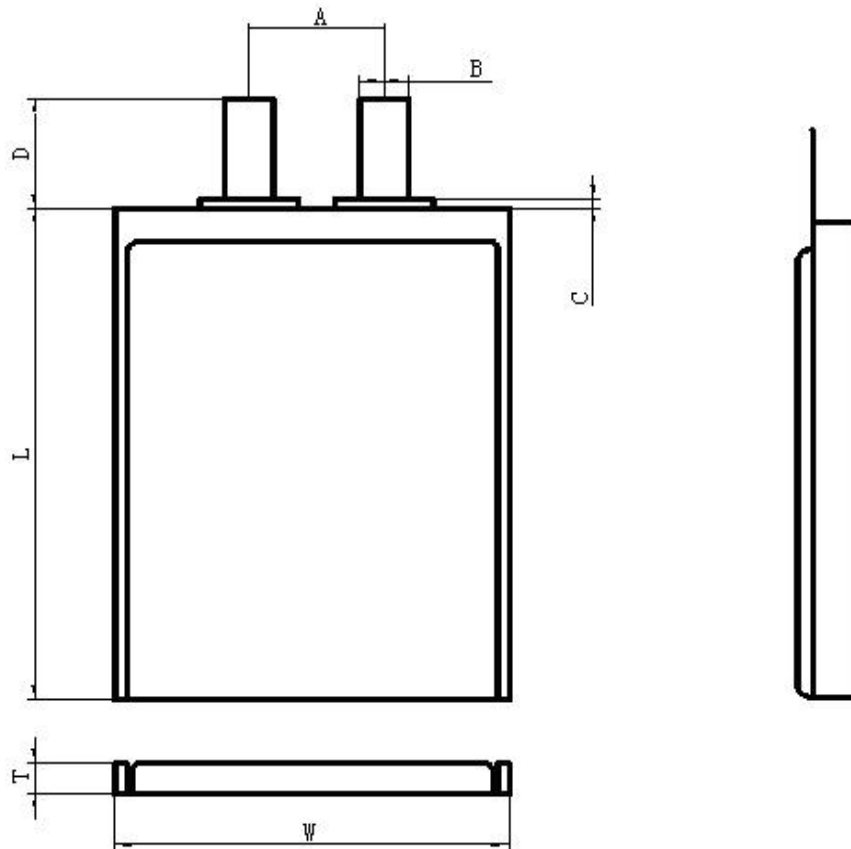

## 12 Electric Protect Features

Item	Symbol	Content	Criterion
Over charge Protection	$V_{DET1}$	Over charge detection voltage	4.28±0.05V
	$tV_{DET1}$	Over charge detection delay time	1.0sMAX
	$V_{REL1}$	Over charge release voltage	4.10V±0.1V
Over discharge protection	$V_{DET2}$	Over discharge detection voltage	2.8±0.10V
	$tV_{DET2}$	Over discharge detection delay time	128msMAX
	$V_{REL2}$	Over discharge release voltage	2.8V±0.1V
Over current protection	$V_{DET3}$	Over current detection voltage	100mV±30mV
	$I_{DP}$	Over current detection current	MIN1.8A    MAX3.5A
	$tV_{DET3}$	Detection delay time	8.0msMAX
		Release condition	Cut load
Short protection		Detection condition	Exterior short circuit
	$T_{SHORT}$	Detection delay time	280 μsMAX
		Release condition	Cut short circuit
Interior resistance	$R_{DS}$	Main loop electrify resistance	$V_C=4.2VR_{DS} \leq 70m\Omega$
Current consumption	$I_{DD}$	Current consumes in normal operation	3.0μA Type    7.0μAMax
0V Prohibition /allowance		allowance	

### 13. Schematic circuit diagram

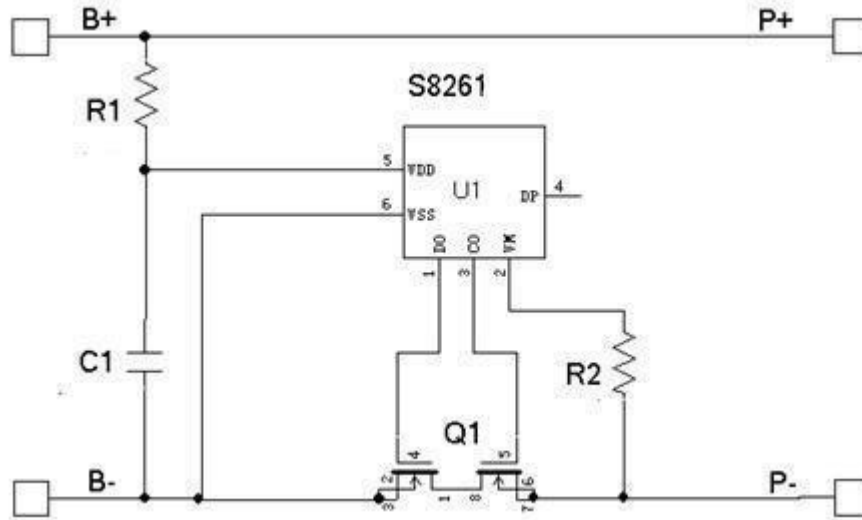


### 14. PCB Parts List BOM


Item	Part Name	Description	QTY	Footprint	Supplier	Remark
1	U1	S-8261ABMMD-G3 MT2x	1pcs	SOT-23-6	SEIKO	
2	Q1	8205A	1pcs	TSSOP-8	MT	
3	R1	470±5%	1pcs	0402	Any approved vendor	
4	R2	2K±5%	1pcs	0402	Any approved vendor	
5	C1	0.1uF±10% 25V	1pcs	0402	Any approved vendor	
6	PCB	PCB2640-15	1pcs		Any approved vendor	

### 15. PCB Layout PCB


Top Layer

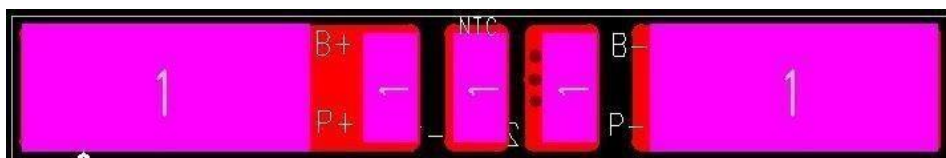

Bottom Layer

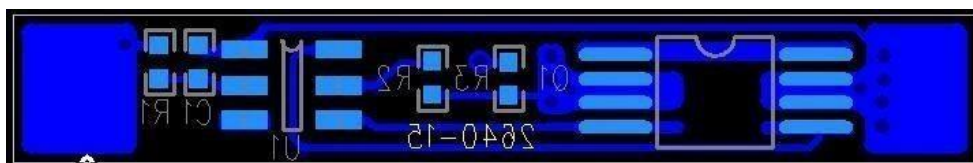

## 16. Package

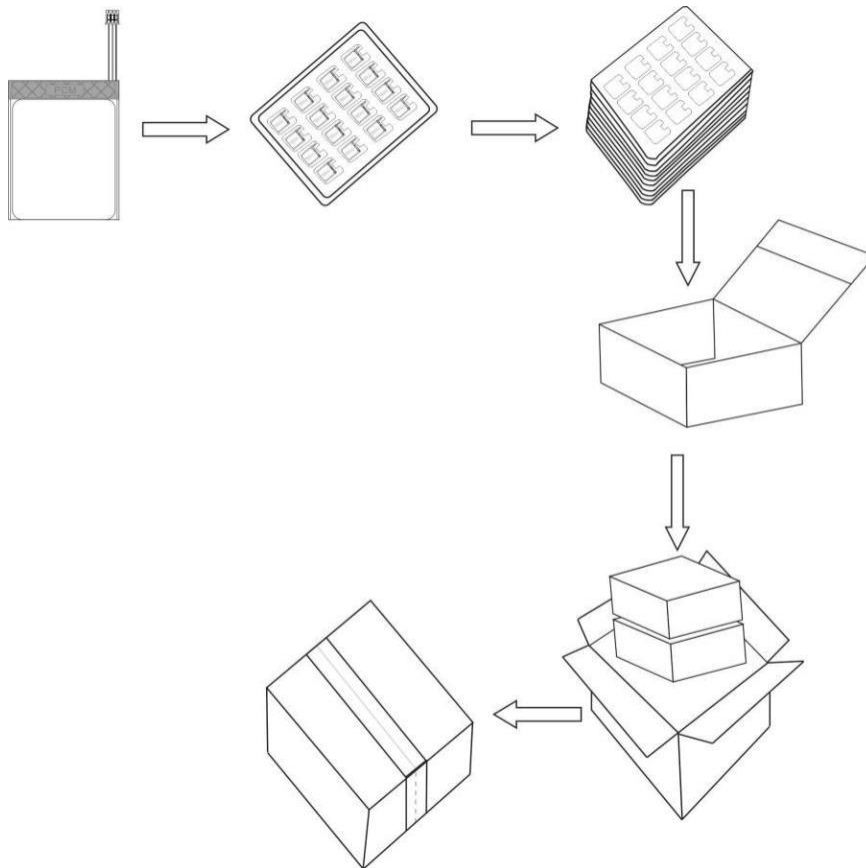

## 17. Warranty, Battery Precautions and Safety Instructions

Please be sure to take to comply with the specifications and the following precautions to use with batteries, if any incidents occur due to not following the specification parameters, and maintenance conditions, NuEnergy Storage Technologies will not accept any responsibility. Limited Warranty Period is 1 year from date of manufacture.

- Maintenance: Please use 0.5C charge current to charge up battery to 60% SOC every 3-6 months to prevent over discharge and degradation while in storage. Every 12 months a full cycle shall be performed to prevent degradation.
- Before Use the battery, carefully read the instruction manual and battery labels.
- Need to use the original battery charger and should be placed in a dry ventilated place.
- Such as long-term when not in use, the battery charger to charge state half full, remove the battery from the device and separated, to avoid metal contact with the battery, causing short-circuit or damage to the phenomenon.
- In use or during storage, battery found there has been high fever, leakage, odor, distortion and other anomalies, please stop using it immediately and stay away from the battery.
- Do not short-circuit the battery positive and negative, and careful not to allow the battery to moisture, to avoid danger.
- When using keep away from heat, High pressure environments, and do not beat, hit the battery.

Battery end of life should be immediately removed from the equipment, please properly handle security of spent batteries, do not put into fire or water.



## Customer Inquiry

1. If clientele wishes to ratify this specification and showpiece, please sign and return specification to NuEnergy in 1 week.
2. The customer is requested to write down your information and contact Nu Energy in advance, if and when the customer needs applications or operating conditions other than those described in this document. NuEnergy could design and build such products according to your special request.

	Special Request	Criteria
1		
2		
3		
4		
5		
6		

Company Name:

Signature:

Date: